


Hip & Ridge Plus

RIDGE CAP SHINGLES

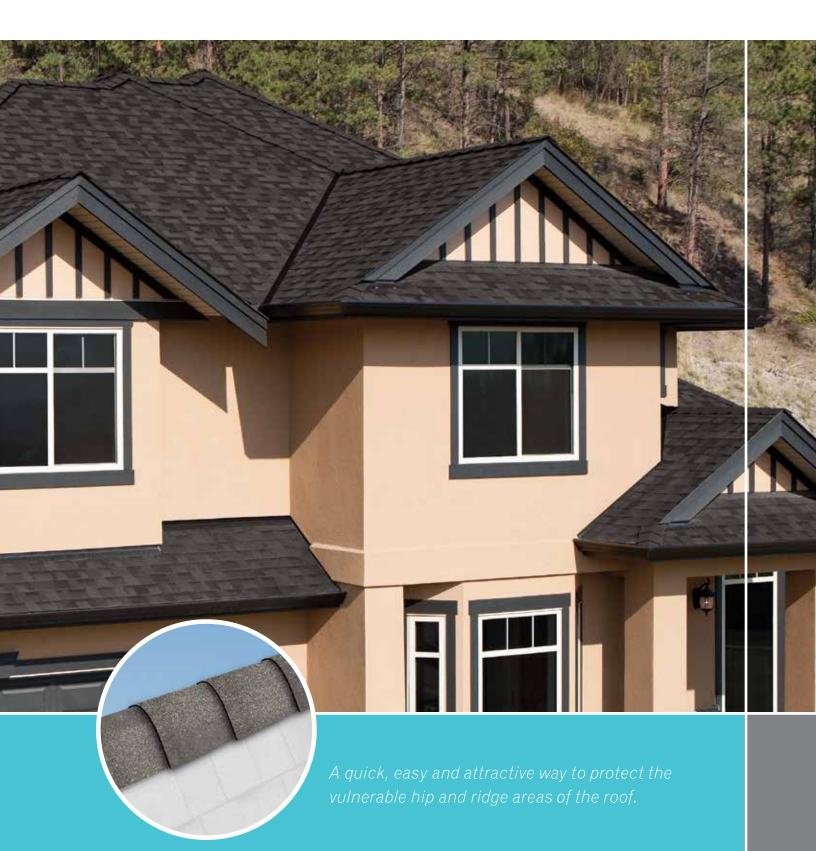


Now you don't have to waste time cutting up shingles to protect those vulnerable hip and ridge areas. IKO has a better-looking, much easier alternative! Introducing IKO Hip & Ridge Plus cap shingles.

- Lightweight, perforated, and with a pre-cut tapered headlap to give you 3 perfectly sized pieces with no cutting required, you'll save on labour costs. Now you can improve the roofline and your bottom line!
- Larger 'metric' size for enhanced roofline appearance.
- · Easy to separate, even at the site of application!
- IKO-SBS modified adhesive sealant for maximum wind protection.
- · Featuring an algae-resistant granule.
- May be applied in a traditional "single" dimensional thickness and appearance. To add dimensional depth, simply apply in two layers, the top layer set back about 3/4" (19 mm).
- Available in colours that match our most popular Cambridge AR, Royal Estate, Armourshake, Grandeur SBS and Crowne Slate shingles!

Prior to application in cold weather, storing the shingles in a heated area will allow for easier bending.

Installation Instructions


- Separate Hip & Ridge Plus shingles into thirds, using the perforation marks as a guide (see Diagram 1).
- These shingles are designed for a 5–5/8" (143 mm) exposure.
 (For a neater appearance, the top of each side of each piece has been factory trimmed on a 1" (25 mm) taper).
- Bend each piece over the hip or ridge, and nail 6–1/8" (156 mm) above the butt edge, 1" (25 mm) in from each edge, exposing each piece 5–5/8" (143 mm).
- Apply hip pieces starting at the lower end of the hip, working up toward the ridge.
- Apply ridge pieces starting at the end opposite to the prevailing wind direction and continue to the other end.



Note: To obtain a three-dimensional effect, (which is recommended, but not required), apply hip and ridge shingles double thickness by stacking 2 pieces on top of one another, the lower piece extending about 3/4" (19 mm) further than the top piece (see Diagram 2).

· The final shingle should be set in cement, and the exposed nail heads of the final shingle should be covered with cement.


SPECIFICATIONS	
Length	39-3/8" (1000 mm)
Width	13-1/4" (337 mm)
Quantity per bundle	21 x 3 = 63
Coverage per bundle	29.5 lin. ft. (9 lin. m)



Note: All values shown are approximate.


Available in colours that match our most popular Cambridge AR, Royal Estate, Grandeur SBS, Armourshake and Crowne Slate shingles!

Colour Availability: Cambridge AR and Grandeur SBS+

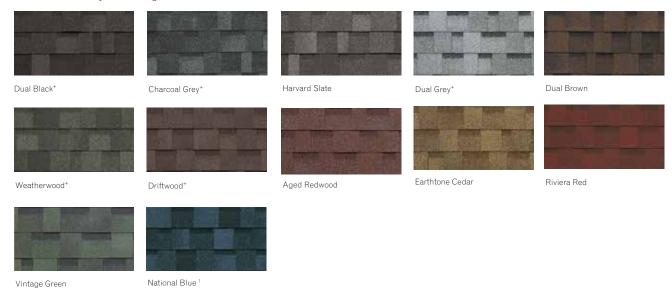

¹ Blue granules may fade after extensive exposure to the sun's ultraviolet rays.

Colour Availability: Royal Estate




Colour Availability: Armourshake / Suggested Hip & Ridge Plus colour.*



^{*}Please note that these Hip & Ridge Plus cap shingle colours are complementary blend matches and are not precise to colours shown above.

Colour Availability: Crowne Slate



Regal Stone



Royal Granite



Shingle Swatches shown are as accurate as modern printing processes allow. Shingle chips shown do not fully represent the entire color blend range of the shingles. To ensure complete satisfaction please make your final color selection from several full size shingles and view a sample of the product installed on a home.

Save time and make your next roofing project easy on yourself.

Just ask for IKO's Hip & Ridge Plus cap shingles!



Find out more about our products now by talking to an IKO Sales Representative, your professional roofing contractor or contact us directly at: United States 1-888-IKO-ROOF (1-888-456-7663), Canada 1-855-IKO-ROOF (1-855-456-7663) or visit our web site at: www.iko.com

Note: The information in this literature is subject to change without notice. IKO assumes no responsibility for errors that may appear in this literature

© Copyright 05/13 - MR3L058